SCREW INFORMATION

Each railing is unique to us at Räckesbutiken. In order to create the best possible attachment for your railing, we do not use a universal screw, but choose the one that fits your railing best.


When you configure your railing, we select which screw fits best and then send the screw and accessories to you.

To see which screw your railing has, click on to overview in the configurator and look below "Screw".

Below you can see which screws we use and which may be relevant for your railing.

SCREW FOR CONCRETE

SCREW INFORMATION

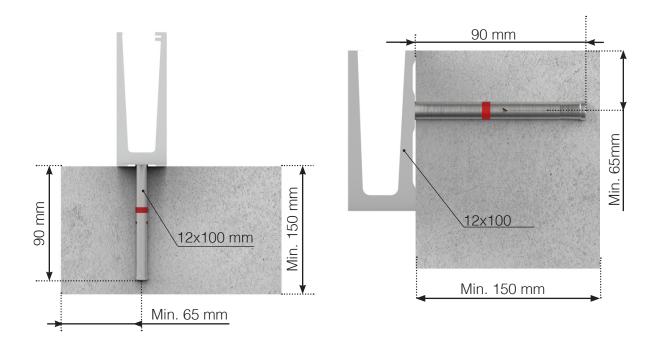

SKRBE12X100A2





Dimensions : 12x100mm Minimum attachment depth : 150 mm Minimum distance from edge: 65 mm Bit: 6mm insex Drill: 12mm



SCREW FOR CONCRETE

SCREW INFORMATION

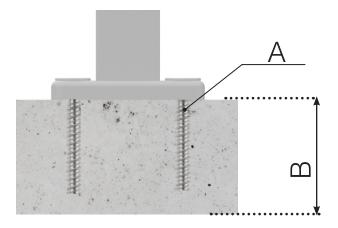



SKRBE10X90

SKRBE75X800



Dimensions (A) : 7,5x80 mm Minimum attachment depth (B): 100 mm Minimum distance from edge (C): 35 mm Bit: Socket wrench 10 mm Drill: 6 mm

Dimensions (A) : 10x90mm Minimum attachment depth (B): 115 mm Minimum distance from edge (C): 45 mm Bit: Socket wrench 13 mm Drill: 8 mm

SKRBE12X90




Dimensions (A): 12x90mm Minimum attachment depth (B): 150 mm Minimum distance from edge (C) : 50 mm Bit: Socket wrench 15 mm Drill: 10 mm



SCREW FOR CONCRETE

SCREW INFORMATION

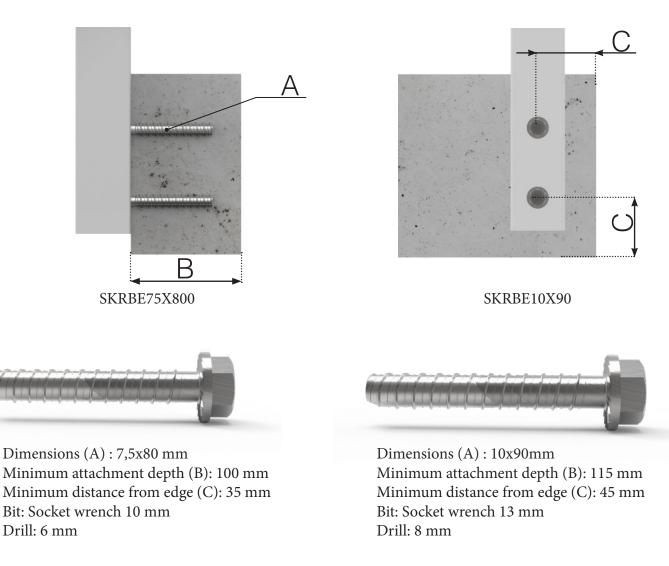

SKRBE12X90



Dimensions (A): 12x90mm Minimum attachment depth (B): 150 mm Minimum distance from edge (C) : 50 mm Bit: Socket wrench 15 mm Drill: 10 mm

